

LGP Equipment - Tracked Dumper


10te Payload

T +44(0) 1931 714270

E info@waitings.co.uk

W www.waitings.co.uk

High stability due to low centre of gravity | Comfortable cab
 Low ground pressure | High traction

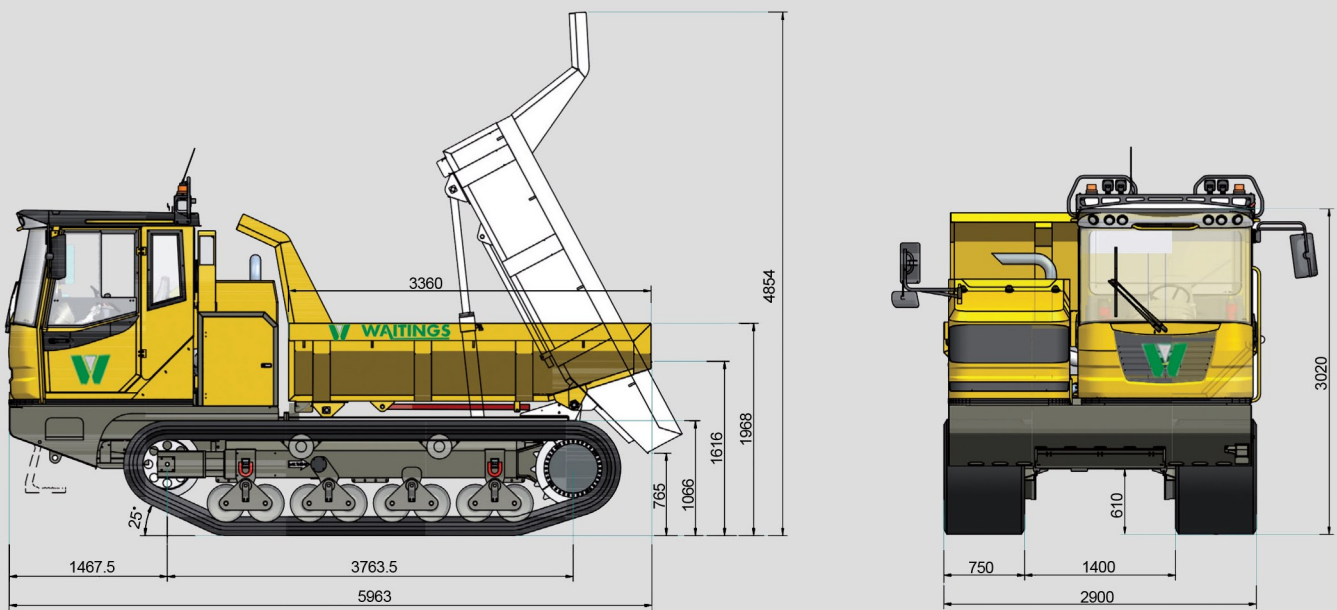

Weight/Bucket Capacity		Brake System	
payload	10.000 kg	inside oilbath multi disc brake	
empty weight	14.250 kg	Engine	
loading capacity struck	4,7 m ³	6 cylinder Cummins diesel engine QSB 6.7 – water cooled – power 180 kW with 2.200 rpm	
loading capacity heaped	6,5 m ³	Width of Tracks	
bucket system	rear tip	750 mm	
Dimensions		Ground Pressure	
clearance height	3.020 mm	0,46 kg/cm ²	
tipping height	765 mm	Bonnet	
loading height (front)	1.968 mm	fast and easy accessibility to all service points thanks to engine opening bonnet in two pieces	
total length	5.963 mm	Tank Capacity	
total width	2.900 mm	fuel	225 L
ground clearance	610 mm	hydraulic oil	180 L
Transmission		Electrics	
hydrostatic drive with planetary transmission		24 V electric system with main switch, error detection mode, fuel and hour counter, control lamps for engine oil; park brake, direction indicator, battery charging control, hydraulic filter, display for drive position	
Speed		Standard Equipment	
speed I	0–8 km/h	comfortable cab with air-suspended driver's seat, road traffic lighting system, bucket from wear-resistant fine-grain steel, beacon light, cigarette lighter, sun roller blind for front windscreen, device for radio, loudspeaker and antenna, CE certificate , manual and spare parts list	
speed II	0–15 km/h		
Steering			
steering wheel or joystick			

